
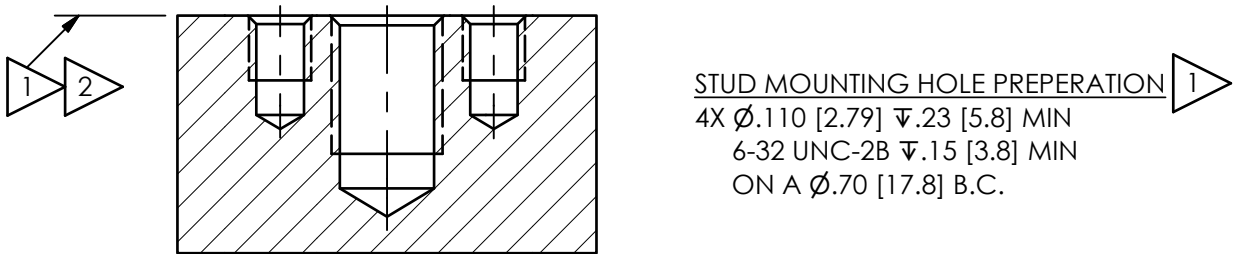
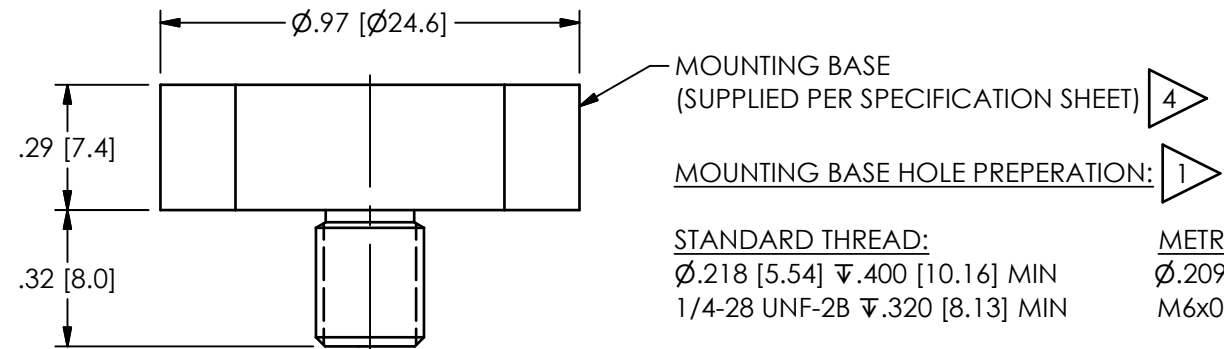
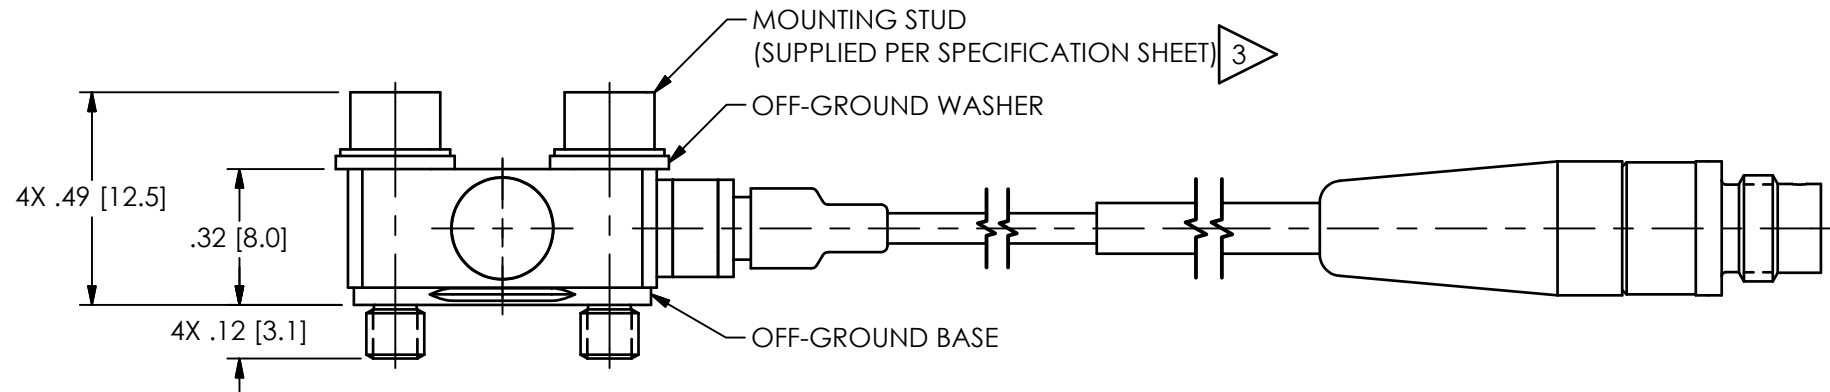


24325

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS		
REV	DESCRIPTION	DIN
D	UPDATED ETCHING & TITLE	51942

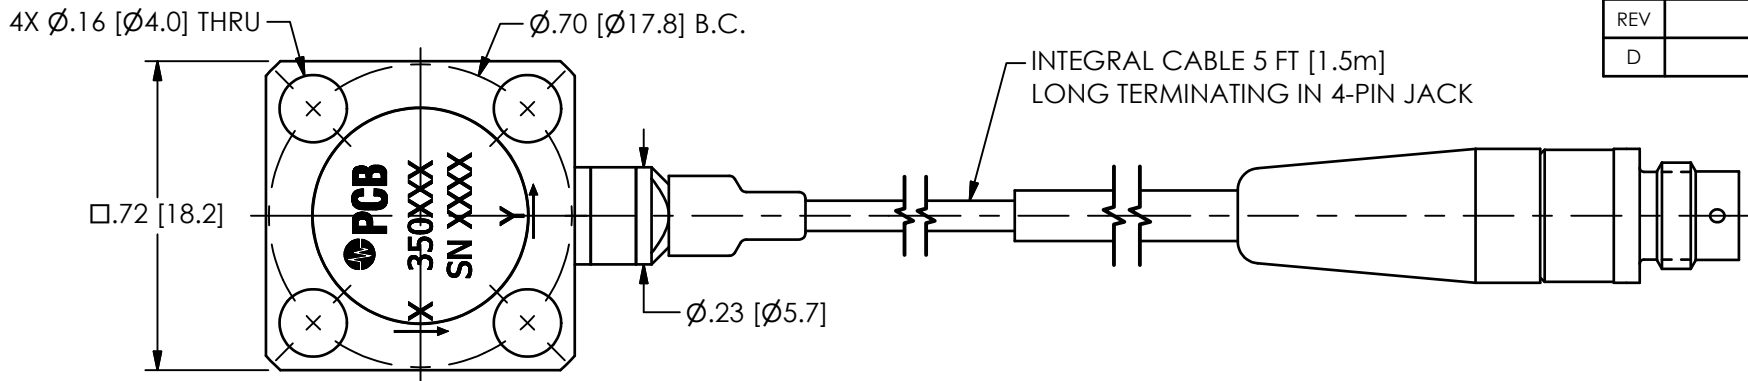

STANDARD THREAD: Ø.218 [5.54] ∇ .400 [10.16] MIN
 1/4-28 UNF-2B ∇ .320 [8.13] MIN

METRIC THREAD: Ø.209 [5.31] ∇ .400 [10.16] MIN
 M6x0.75-6H ∇ .320 [8.13] MIN

STUD MOUNTING HOLE PREPERATION 1
 4X Ø.110 [2.79] ∇ .23 [5.8] MIN
 6-32 UNC-2B ∇ .15 [3.8] MIN
 ON A Ø.70 [17.8] B.C.

- 4 RECOMMENDED MOUNTING TORQUE 2-5 FT-LBS [3-7 N-m]
- 3 RECOMMENDED MOUNTING TORQUE 5-9 IN-LBS [57-100 N-cm]
- 2 MOUNTING SURFACE SHOULD BE FLAT TO WITHIN .001 [0.03] T.I.R. OVER Ø1.0 [25.4], WITH A MINIMUM 32 [0.8] FINISH FOR THE BEST RESULTS
- 1 DRILL PERPENDICULAR TO MOUNTING SURFACE TO WITHIN $\pm 1^\circ$

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES DECIMALS XX \pm .01 XXX \pm .005 ANGLES ± 2 DEGREES	DIMENSIONS IN MILLIMETERS [IN BRACKETS] DECIMALS X \pm 0.3 XX \pm 0.13 ANGLES ± 2 DEGREES	JJF	7/19/21	JJF	7/19/21	GCD	7/19/21
CABLE TOLERANCES IN ENGLISH 1" \leq LENGTH < 1' = +1' / - 0 1' \leq LENGTH < 5' = +2' / - 0 5' \leq LENGTH < 100' = +6' / - 0 100' \leq LENGTH = +1' / - 0	CABLE TOLERANCES IN METRIC 2.54cm \leq LENGTH < 30.5cm = +2.54cm / - 0 30.5cm \leq LENGTH < 1.5m = +5.1cm / - 0 1.5m \leq LENGTH < 30.5m = +15.2cm / - 0 30.5m \leq LENGTH = +30.5cm / - 0	TITLE					
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13	INSTALLATION DRAWING 350 SERIES TRIAxIAL SHOCK SENSOR					
		CODE IDENT. NO. 52681		DWG. NO. 24325		SCALE: 2.25X SHEET 1 OF 1	

PCB PIEZOTRONICS
AN AMPHENOL COMPANY

3425 WALDEN AVE. DEPEW, NY 14043
(716) 684-0001 E-MAIL: sales@pcb.com